

MAXHUB XCore Room Kit for Microsoft Teams Rooms

Model: XT10-VB Kit

MAXHUB XT10-VB Kit showcases its versatility with the addition of an exceptional Videobar. Designed with simplified front-line one-cable deployment and remarkable expandability, this bundle effortlessly accommodates the evolving needs of multiple devices. Compatible with Microsoft Teams Rooms, the Kit also helps to facilitate the switch to Microsoft Teams Rooms smart spaces for BYOD scenarios, enhancing Teams-native audio and video experiences while accommodating cost-balance needs.



One Cable Technology



Device Management



Flexible & Ease of Installation



Easy Content Sharing



3-Year Warranty & Local support



Secured and Managed

Product Specification

Type	Mini-PC
CPU	Intel i3-1220P TDP: 28W
Memory	8GB DDR4 3200MHz
Optional hard disk	128GB SATA SSD (M.2-2280 SATA3 up to 6Gb/s)
Graphics	Intel® UHD Graphics for 12th Gen Intel® Processors;
Chipset	ADL PCH-P
Sound Card	USB Audio, HS-100B, Cmedia
Network	1000Mbps RJ45
Operating system	Windows 11 IoT Enterprise SAC

Certifications

Certifications	Microsoft Teams Rooms
----------------	-----------------------

I/O Port

USB-A 3.0	4
LAN	1
USB-C (For Teams Rooms Console)	1
HDMI OUT	1
Audio OUT	1
AC POWER	1
Kensington lock slot	1

Power

Power Supply Mode	AC POWER
Power Requirements	100-240V AC 50/60Hz
Max Power	90W

Accessories (included in the package)

Wall Bracket	x1
PC Bracket	x1
Cable Cover Screw	x2
Machine Screw	x4
Expansion Screw	x4
Self-tapping Screw	x4
Cable Cover	x1
HDMI Cable (1.8m/5.9ft)	x1
Power Cord (1.8m/5.9ft)	x1
Quick Start Guide	x1

Physical Specifications

Dimension L × W × H	230mm × 185mm × 41.5mm / 9.06" x 7.28" x 1.63"
Dimension (package) L × W × H	342 × 246 × 146mm / 13.46" x 9.69" x 5.75"
Net Weigh	1.36kg / 3lbs
Gross Weight	4.36kg / 9.6lbs

Environmental Conditions

Operation Temperature	0°C-40°C / 0°F-104°F
Operation Humidity	10%-90%RH
Storage Temperature	-20°C-60°C / -4°F-140°F
Storage Humidity	10%-90%RH
Altitude	Below 5000m/196850"

Display

Size	10.1 inch
Resolution	1920 (H) x 1200 (V)
Frequency Refresh Rate	60Hz
NTSC	Min.62%, Typ.65%
Back Light Unit	ELED
Brightness with glass	Min.250cd/m ² , Typ.300cd/m ²
Life Time	≥ 20000 Hours

Touch System

Type	Capacitive touch
Touch Tool	Finger
Accuracy	± 2mm / 0.08"
Touch Point	10 points touch
Minimum object size	6mm / 0.24"

I/O Port

HDMI INGEST (SCREEN SHARE)	1
USB-A (USB PERIPHERAL)	1
USB-C (TO PC)	1
3.5mm (AUDIO OUT)	1

Physical Specifications

Dimension L×H×D	245 × 164.3 × 77.4mm / 9.65" x 6.47" x 3.05"
Dimension (package) L×W×H	332 × 246 × 166mm / 13.07" x 9.69" x 6.54"
Net Weight	880g / 1.94lbs
Gross Weight	2.38kg / 5.25lbs

Accessories (included in the package)

USB Type-C Cable (Type C-C) 5m / 16.4ft	×1
HDMI Cable 1.8m / 5.9ft	×1
Quick Start Guide	×1

Power

Power Requirements	15V 3A (Type-C PD)
Overall Power (Max.)	20W
Standby Power	≤ 0.5W

Environmental Conditions

Operation Temperature	0°C-40°C / 0°F-104°F
Operation Humidity	10%~90%RH
Storage Temperature	-20°C-60°C / -4°F-140°F
Storage Humidity	10%~90%RH
Altitude	Below 5000m/ 196850"

Camera		Audio	
Pixel	12MP	Speaker	
Sensor	1/2.3-inch 12MP Sony sensor	Sound Chanel	1.1
Resolution and Frame Rate		Output Power	8W + 3W
H.264/MJPEG	(1) 3840 x 2160	(2) 2560 x 1440	(3) 1920 x 1080
	(4) 1280 x 720	(5) 1024 x 576	(6) 960 x 540
	(7) 800 x 600	(8) 640 x 480	(9) 640 x 360
	(10) 480 x 270	(11) 352 x 288	(12) 320 x 240
YUY2	(1) 640 x 480	(2) 640 x 360	(3) 480 x 270
	(4) 352 x 288	(5) 320 x 240	(6) 320 x 180
	(7) 160 x 120		
ZOOM	5x Digital Zoom		
Output Format	MJPEG; YUY2; H.264		
Field Of View	120° (D)		
Adjustable Angle	± 15° (V)		
Focus Mode	Fixed-Focus		
Focus Distance	1m/39.4"		
Special Features	Auto Framing: automatic adjustment FOV to fit in all participants Speaker Tracking: voice triggered people tracking 10 Zooming Pre-sets for instant setting up		
Power		Microphone	
Power Requirements	12V	Microphone Quantity	6
Overall Power(Max.)	10W	Voice Pickup Range	8m/314.96"
PoE Power	Yes (IEEE 802.3af or 802.3at)	Microphone Frequency Range	100Hz ~ 7.5kHz
System Requirements		Special Features	
Supports Windows XP/7/8.1/10/11, Android 8.1 or higher, and MAC OS 10.12 or higher		Noise Reduction, Echo Cancellation, Anti-Reverberation, Built-in AGC Algorithm	
Application Supported		Input/Output Port	
MAXHUB Align software for Windows & Mac OS		USB 3.0 Type-C	Connect USB host, upgrade system, etc.
PIR Sensor		Audio Out	Used for external audio equipment
In power-on mode, it will automatically enter standby state if no moving object is detected within 3 meters within 30 minutes, minimizing energy consumption; In standby mode, it automatically starts up when detecting moving objects within 3 meters, simplifying the setup process.		DC 2.0	Used for 12V power input power supply
Mount		RJ45	No IP Support, only provides PoE power
Wall-mounted TV mount kit (Optional)		Compatibility	
Physical Specifications		Support major VC software including ZOOM, Microsoft® Teams, Google Meet, Google Hangouts, Cisco WebEx®, RingCentral, etc.	
Dimension(Lx Hx D)	462 x 76 x 93 mm (18.2 x 3.0 x 3.7 inch)	Environmental Condition	
Dimension(package)(Lx Hx D)	1pcs 538 x 160 x 169 mm (21.2 x 6.3 x 6.7 inch) 4pcs 628 x 433 x 380 mm (24.7 x 17.0 x 15.0 inch)	Operation Temperature	0°C - 40°C
Net Weight	1.05Kg/2.31lbs	Operation Humidity	10% - 90%RH
Gross Weight	1pcs 2.55kg/5.62lbs 4pcs 12.00kg/26.46lbs	Storage Temperature	-20°C - 60°C
Warranty		Storage Humidity	10% - 90%RH
3 Year hot swap		Altitude	Below 5000m/196850"
What's In The Box		Accessories	
included	1 x USB Cable (1.8m/70.9 inch), 1 x Remote Control 1 x Power Adapter, 1 x Wall-mounted Components, 1 x Peeping Cover	Accessories one year	


XCore Kit Package Includes

- XC13T Mini-PC x1
- TCP20T Touch Control Panel x1
- UC S07 x1

Package Physical Specifications

- Dimension (package) L×W×H 705x440x265mm / 27.76"x17.32"x10.43"
- Net Weight 9.068kg/19.99lbs
- Gross Weight 11.49kg/25.33lbs

Connection

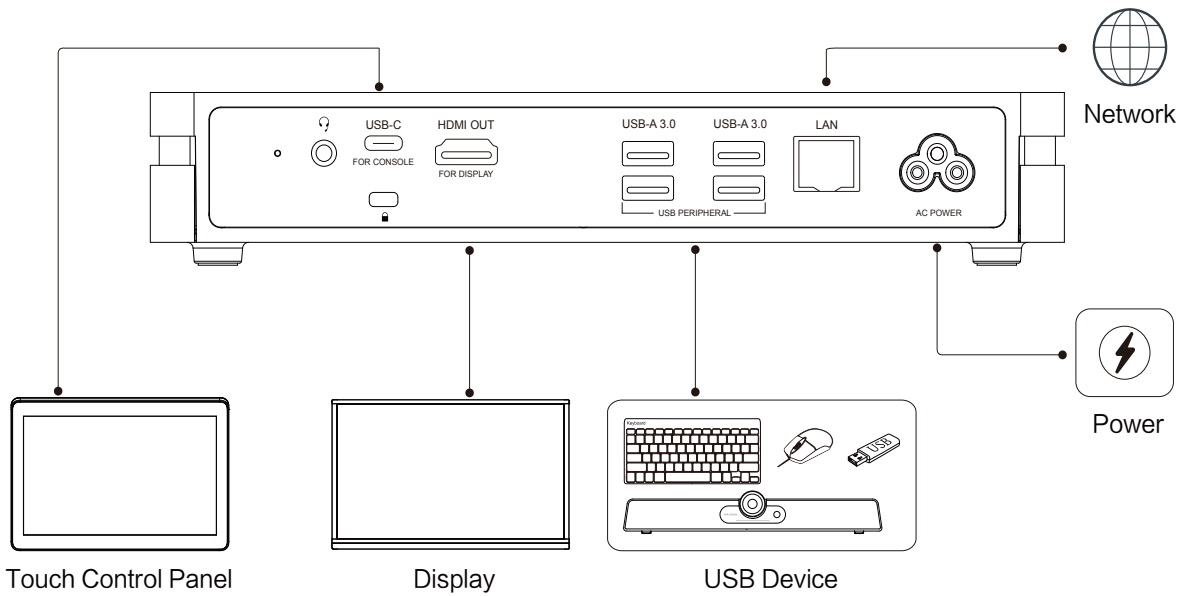





Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product. The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance. Should the above-mentioned change in the document become necessary, the document may be updated without written notice.



bsdisplaymy.com

 jenny@bigshinemy.com
 john@bigshinemy.com

 011-1147 9833
 011-3758 4093