

MAXHUB XCore Room Kit for Microsoft Teams Rooms

Model: XT10-WS Kit

MAXHUB XT10-WS Kit incorporates a high-quality Speakerphone and USB Camera. With the inclusion of a mobile Speakerphone and camera, this bundle adeptly caters to participants' dynamic audio and video needs, driving a flexible and seamless collaboration experience. Compatible with Microsoft Teams Rooms, the Kit also helps to facilitate the switch to Microsoft Teams Rooms smart spaces for BYOD scenarios, enhancing Teams-native audio and video experiences while accommodating cost-balance needs.



One Cable Technology



Device Management



Flexible & Ease of Installation



Easy Content Sharing



3-Year Warranty & Local support



Secured and Managed

Product Specification

Type	Mini-PC
CPU	Intel i3-1220P TDP: 28W
Memory	8GB DDR4 3200MHz
Optional hard disk	128GB SATA SSD (M.2-2280 SATA3 up to 6Gb/s)
Graphics	Intel® UHD Graphics for 12th Gen Intel® Processors;
Chipset	ADL PCH-P
Sound Card	USB Audio, HS-100B, Cmedia
Network	1000Mbps RJ45
Operating system	Windows 11 IoT Enterprise SAC

Certifications

Certifications	Microsoft Teams Rooms
----------------	-----------------------

I/O Port

USB-A 3.0	4
LAN	1
USB-C (For Teams Rooms Console)	1
HDMI OUT	1
Audio OUT	1
AC POWER	1
Kensington lock slot	1

Power

Power Supply Mode	AC POWER
Power Requirements	100-240V AC 50/60Hz
Max Power	90W

Accessories (included in the package)

Wall Bracket	x1
PC Bracket	x1
Cable Cover Screw	x2
Machine Screw	x4
Expansion Screw	x4
Self-tapping Screw	x4
Cable Cover	x1
HDMI Cable (1.8m/5.9ft)	x1
Power Cord (1.8m/5.9ft)	x1
Quick Start Guide	x1

Physical Specifications

Dimension L × W × H	230mm × 185mm × 41.5mm / 9.06" x 7.28" x 1.63"
Dimension (package) L × W × H	342 × 246 × 146mm / 13.46" x 9.69" x 5.75"
Net Weigh	1.36kg / 3lbs
Gross Weight	4.36kg / 9.6lbs

Environmental Conditions

Operation Temperature	0°C-40°C / 0°F-104°F
Operation Humidity	10%-90%RH
Storage Temperature	-20°C-60°C / -4°F-140°F
Storage Humidity	10%-90%RH
Altitude	Below 5000m / 196850"

Display

Size	10.1 inch
Resolution	1920 (H) x 1200 (V)
Frequency Refresh Rate	60Hz
NTSC	Min.62%, Typ.65%
Back Light Unit	ELED
Brightness with glass	Min.250cd/m ² , Typ.300cd/m ²
Life Time	≥ 20000 Hours

Touch System

Type	Capacitive touch
Touch Tool	Finger
Accuracy	± 2mm / 0.08"
Touch Point	10 points touch
Minimum object size	6mm / 0.24"

I/O Port

HDMI INGEST (SCREEN SHARE)	1
USB-A (USB PERIPHERAL)	1
USB-C (TO PC)	1
3.5mm (AUDIO OUT)	1

Physical Specifications

Dimension L×H×D	245 × 164.3 × 77.4mm / 9.65" x 6.47" x 3.05"
Dimension (package) L×W×H	332 × 246 × 166mm / 13.07" x 9.69" x 6.54"
Net Weight	880g / 1.94lbs
Gross Weight	2.38kg / 5.25lbs

Accessories (included in the package)

USB Type-C Cable (Type C-C) 5m / 16.4ft	×1
HDMI Cable 1.8m / 5.9ft	×1
Quick Start Guide	×1

Power

Power Requirements	15V 3A (Type-C PD)
Overall Power (Max.)	20W
Standby Power	≤ 0.5W

Environmental Conditions

Operation Temperature	0°C-40°C / 0°F-104°F
Operation Humidity	10%-90%RH
Storage Temperature	-20°C-60°C / -4°F-140°F
Storage Humidity	10%-90%RH
Altitude	Below 5000m/ 196850"

Connect	USB-A Dongle for wireless connection to PC PC via combined USB-A (to PC) and USB-C (to BM35) cable; smartphone via Bluetooth	
Compatible	Compatible with Windows 7/8/8.1/10/11, MAC OS 10.10 and above	
User Interface Features		
Physical button user controls for	Touch button user controls for	LED Indicator light
Power on/off	Call/hang up	Annular LED
Bluetooth Pairing	Mute	
	Volume +/-	
Wireless		
Bluetooth		
Version	BT5.3	
Operating Frequency	2.4GHz	
Operating Distance	10m/393.7"	
Compatibility	Support audio playback, HD audio input	
Dual Bluetooth Design	One dedicated Bluetooth for connection to the MAXHUB Bluetooth Dongle, the other Bluetooth can be flexibly connected to smartphones and other devices.	
Wireless connection to your computer via the included Bluetooth Dongle; Expand your BM35 by wireless daisy-chain to suit meeting rooms with up to two BM35.		
NFC	Connect your Android device with NFC	
Battery		
Battery Type	Lithium-ion battery	
Battery Capacity	4400mAh	
Talk Time	up to 15h	
Music Time	up to 8h	
Charge Time	4h 40m (5V 1A)	
Physical Specification		
Dimensions(LxWxH)	126.7 x 126.7 x 35.3 mm (5.0 x 5.0 x 1.4 inch)	
Dimension(package)(LxWxH)	1pcs 225 x 158 x 50 mm (10.0 x 6.2 x 2.0 inch) 20pcs 472 x 335 x 292 mm (18.6 x 13.2 x 11.5 inch)	
Net Weight	0.47Kg/1.04lbs	
Gross Weight	1pcs 0.71kg/1.57lbs 20pcs 16.89kg/37.24lbs	
Audio Features		
Microphone		
Quantity	8	
Voice Pickup Range	6m/236.2"	
Type	Digital Microphone	
Microphone Frequency Range	(1) USB: 100Hz ~ 12kHz; (2) Bluetooth: 100Hz ~ 7.5kHz	
Special Features	AI noise reduction, filter-off background noise such as keyboard noise, table and chair moving noise, road noise, etc.	
Speaker		
Sound Channel	1.1	
Output Power	5W + 3W	
Maximum Sound Pressure	80dB SPL@1m	
Distortion	<7% (80Hz ~ 350Hz); <3% (351Hz ~ 4kHz); (4.1kHz~5.8kHz)	
Signal to Noise Ratio	>75dB	
Frequency Range	80Hz ~ 18kHz	
Special Features	Using treble + bass combo design for wider music bandwidth.	
Environmental		
Operation Temperature	0°C-40°C	
Operation Humidity	10% ~ 90% RH	
Storage Temperature	-20°C-60°C	
Storage Humidity	10% ~ 90% RH	
Altitude	Below 5000 meter/196850'	
Supported Applications		
MAXHUB Align software for Windows & Mac		
Platform Certification		
ZOOM Certified Supports major VC software including ZOOM, Microsoft® Teams, Google Meet, Google Hangouts, Cisco WebEx®, RingCentral, etc.		
Warranty		
3-year hot swap warranty		
What's in the box		
1 x USB TYPE-C Cable (1.0m/39.37 inch) , 1 x USB dongle		

Camera Parameters

Image Sensor	IMX577
Pixel	12MP
Output Resolution	H.264/MJ: (1) 3840×2160 (2) 2560×1440 (3) 1920×1080 (4) 1280×720 (5) 1024× 576 (6) 960×540 (7) 800× 600 (8) 640×480 (9) 640×360 (10) 480×270 (11) 352×288 (12) 320×240 (13) 320×180 NV12 / YUY2: (1) 1920×1080 (2) 1280×720 (3) 640×360
Focus Method	FF
Field Of View	FOV(H): 109.1° FOV(V): 74.4° FOV(D): 117.8°
Touch Point	2.4
Digital Noise Reduction	Yes
Output Format	MJPEG;H.264;YUY2;NV12
White Balance	Yes
Exposure	Yes

I/O Port

USB Type-C(Device)	1
--------------------	---

Microphone Parameters

Quantity	2
Pickup Distance	4m/157.5"

Physical Specifications

Dimension L×H×D	85×63×68.2mm/3.35"×2.48"×2.69"
Dimension (package) L×W×H	160×144×114mm/6.3"×5.67"×4.49"
Net Weight	175g/0.39lbs
Gross Weight	300g/0.66lbs

Accessories

USB Cable	×1
Privacy cover	×1
Hand-tightened screw	×1

Environmental Conditions

Operation Temperature	0℃~40℃
Operation Humidity	10%~90%RH
Storage Temperature	-20℃~60℃
Storage Humidity	10%~90%
Altitude	Below 5000m/196850"


Package Includes

- XC13T Mini-PC x1
- TCP20T Touch Control Panel x1
- UC BM35 x1
- UC M31 x1

Package Physical Specifications

- Dimension (package) L×W×H 890x270x265mm/35.04"x10.63"x10.43"
- Net Weight 8.034kg/17.7lbs
- Gross Weight 9.91kg/21.85lbs

Connection

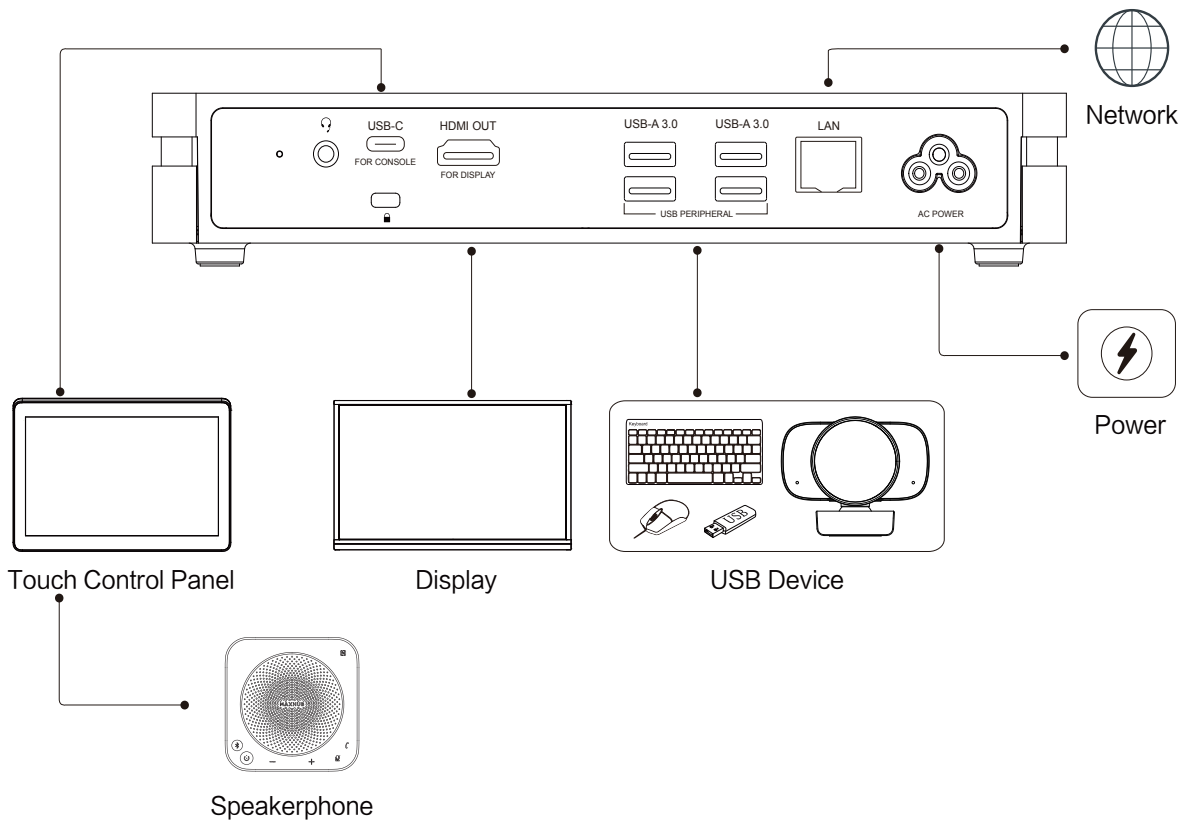

Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product. The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance. Should the above-mentioned change in the document become necessary, the document may be updated without written notice.